

Distributed by:




S.I.A.T.A Asia Pacific Pte Ltd

37 Tannery Lane
#06-08 Tannery House
Singapore 347790
Tel: +65 6741 2994 • Fax: +65 6741 2995

www.siata.com.sg

PRODUCT DATA SHEET

Product: **W5 (3-6 mm NOM +/- 8%)**
Appearance: Gravel
Main Applications: Filtration Medium
Indicative Grade Analysis: Sieve Standards: ASTM C136, AS1141.11.1, AWS App B
Sampling Methods: ASTM D75, AS1141.3.1

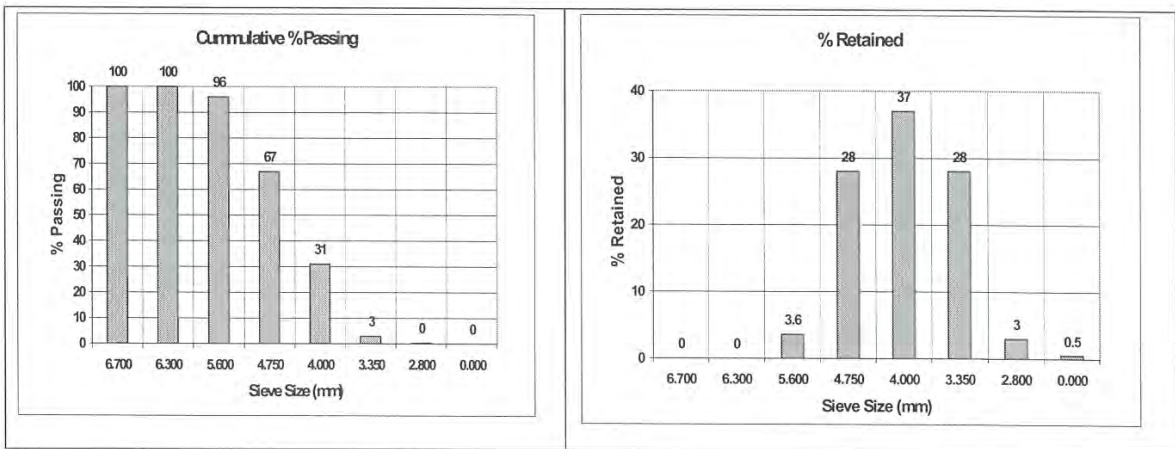

Note: Indicative grading only. Grading analysis will vary slightly over time due to changes in raw feed.

Other Properties

Moisture Content <5%
Bulk Density approx. 1.4 t/m³
Acid Solubility <1%
Material <75 µm <1%
Specific Gravity >2.5

Test Methods

AS 1289.2.1.1
AS1141.4, AWS App D
AWWA-B100 (50% HCl)
ASTM C117, AS1141.12
ASTM C127, AS 1141.6.1

River Sands operates and maintains a Quality Certified system in accordance with AS/NZS ISO 9001
The Quality system is third party certified by NATA. Registration # 6898
River Sands also maintains a registered NATA laboratory. Registration # 10470