

Distributed by:



**S.I.A.T.A Asia Pacific Pte Ltd**

37 Tannery Lane  
#06-08 Tannery House  
Singapore 347790  
Tel: +65 6741 2994 • Fax: +65 6741 2995

**www.siata.com.sg**


**PRODUCT DATA SHEET**

Product: #6.5 (0.8 -1.8 mm NOM +/-8%)

Appearance: Dry sand, graded to the above specification

Main Applications: Filtration Medium

Indicative Grade Analysis: Sieve Standards: ASTM C136, AS1141.11, AWS App B  
Sampling Methods: ASTM D75, AS1141.3.1

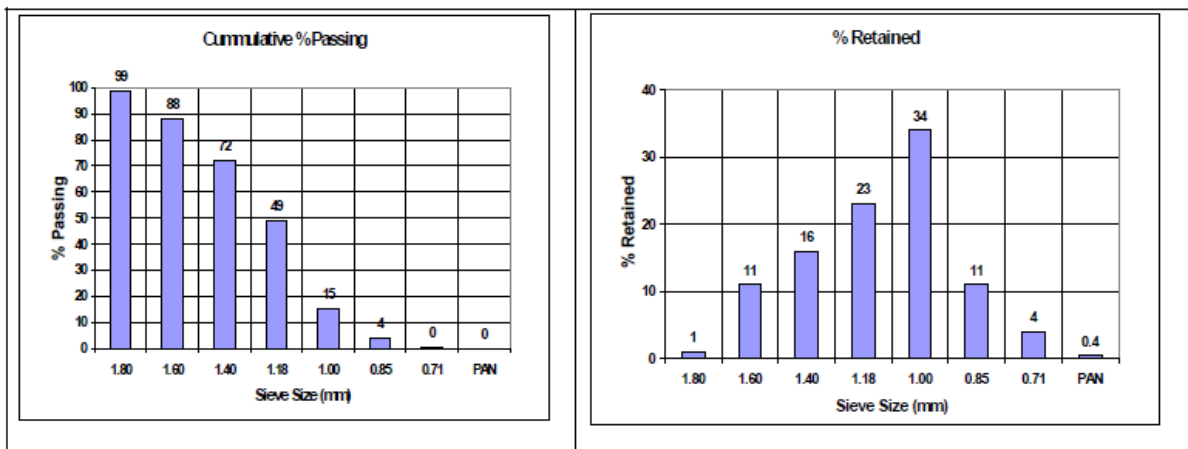

**Note:** Indicative grading only. Grading analysis will vary slightly over time due to changes in raw feed.

**Other Properties**

Moisture Content <5%  
Bulk Density approx. 1.4 t/m<sup>3</sup>  
Acid Solubility <1%  
Material <75 µm <1%  
Specific Gravity >2.5

**Test Methods**

AS 1289.2.1.1  
AS1141.4, AWS App D  
AWWA-B100 (50% HCl)  
ASTM C117, AS1141.12  
ASTM C128, AS 1141.5

River Sands operates and maintains a Quality Certified system in accordance with AS/NZS ISO 9001  
The Quality system is third party certified by NATA. Registration # 6898  
River Sands also maintains a registered NATA laboratory. Registration # 10470