

Distributed by:



S.I.A.T.A Asia Pacific Pte Ltd

37 Tannery Lane
#06-08 Tannery House
Singapore 347790
Tel: +65 6741 2994 • Fax: +65 6741 2995

www.siata.com.sg

PRODUCT DATA SHEET

Product:

7M (ES 0.45-0.55 mm UC <=1.5)

Appearance:



Dry sand, graded to the above specification.

Main Applications:

Filtration Medium

Indicative Grade Analysis:

Sieve Standards: ASTM C136, AS1141.11, AWS App B
Sampling Methods: ASTM D75, AS1141.3. 1

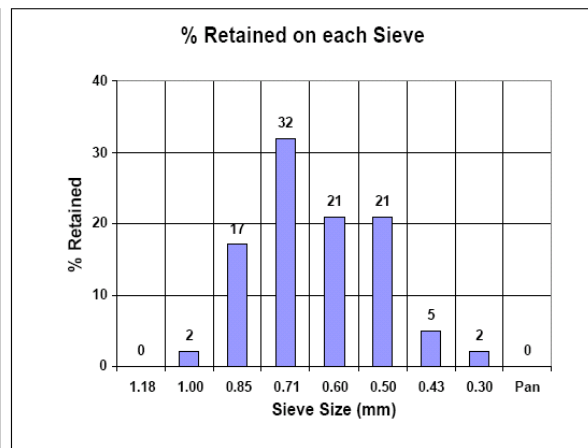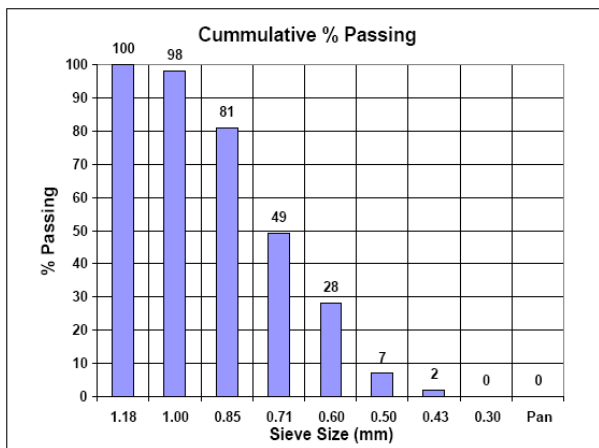

Note: Indicative grading only. Grading analysis will vary slightly over time due to changes in raw feed.

Other Properties

Moisture Content <5%
Bulk Density approx. 1.4 t/m³
Specific Gravity >2.5
Acid Solubility <1%
Material <75µm <1%

Test Methods

AS 1289.2.1.1
AS1141.4, AWS App D
ASTM C128, AS1141.5
AWWA-B100 (50% HCl)
ASTM C117, AS1141.12

River Sands operates and maintains a Quality Certified system in accordance with AS/NZS ISO 9001

The Quality system is third party certified by NATA.

River Sands also maintains a registered NATA laboratory.

Registration # 6898

Registration # 10470