DIAION[™] UBK08

DIAION™ UBK08 is a cation exchange resin with a uniform particle size. It has standard cross-linkages and excellent properties. A wide range of applications, especially in a field of manufacturing and processing pure water, is recommended.

Product		
Grade Name		DIAION [™] UBK08
Туре		Strong Acid Cation
Matrix		Styrene-DVB, Gel
Functional Group		Sulfonic acid
lonic Form		Na [†]
Specification		
Whole Bead Count	Ħ	90 min.
Salt Splitting Capacity	meq/mL	2.0 min.
Water Content	%	43 - 49
Average Diameter	μm	600 ± 50
Uniformity Coefficient	722	1.10 max.
Typical Properties		
Shipping Density	g/L	840
Particle Density	g/mL	1.28
Total Swelling (Na ⁺ to H ⁺)	%	9
Recommended Operating Conditions		
Maximum Operating Temperature	°C	120
Operating pH Range		0 - 14
Minimum Bed Depth	mm	800
Service Flow Rate	m/h	10 - 40
Regenerant		HCI
		H_2SO_4
Regenerant Concentration	%	HCl 4 - 10
		H ₂ SO ₄ 1 - 4
Regenerant Level	g/L	30 - 150
Regenerant Flow Rate	m/h	2 - 10
Total Rince Requirement	BV	2 - 10

Distributed by:



DIAION[™] UBK08

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of DIAIONTM UBK08 resin in normal down flow operation is shown in the graphs below.

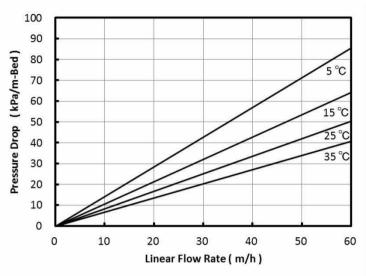


Fig. 1 Pressure Drop of UBK08

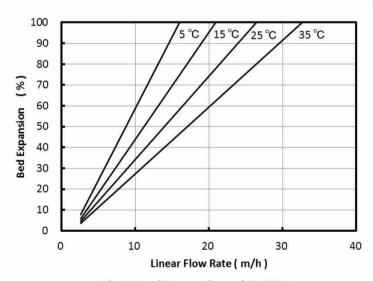


Fig. 2 Bed Expansion of UBK08

Distributed by:



www.siata.com.sg

DIAION[™] UBK08

Operational Capacity Data

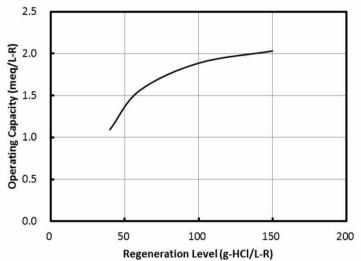


Fig. 3 Operational Capacity Data of UBK08

Regenerant: 4 % HCl

Distributed by:



www.siata.com.sg

Notice

This information are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The application, use and processing of our products are beyond our control and therefore your own responsibility.