

Distributed by:





S.I.A.T.A Asia Pacific Pte Ltd

37 Tannery Lane
#06-08 Tannery House
Singapore 347790
Tel: +65 6741 2994 • Fax: +65 6741 2995

www.siata.com.sg

PRODUCT DATA SHEET

<u>Product:</u>	7C (ES 0.56-0.70 mm UC ≤ 1.5)
<u>Appearance:</u>	Dry sand, graded to the above specification
<u>Main Applications:</u>	Filtration Medium
<u>Indicative Grade Analysis:</u>	Sieve Standards: ASTM C136, AS1141.11, AWS App B Sampling Methods: ASTM D75, AS1141.3.1

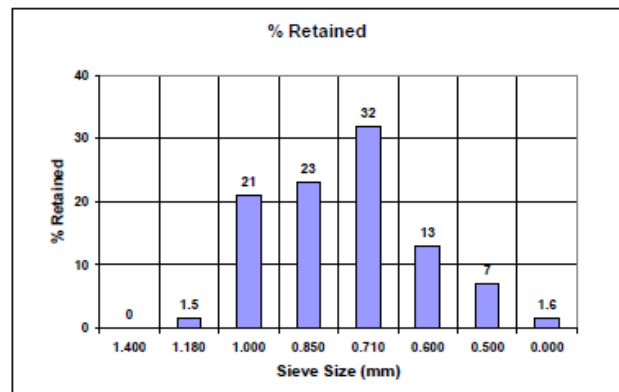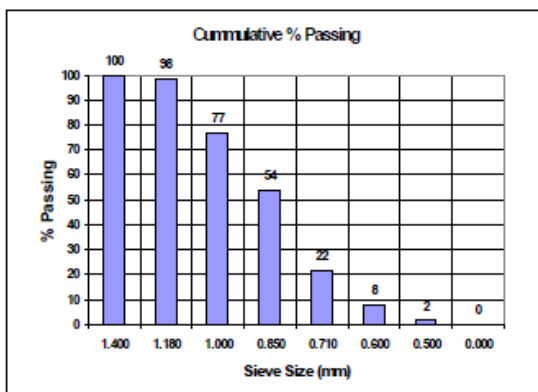

Note: Indicative grading only. Grading analysis will vary slightly over time due to changes in raw feed.

Other Properties

Moisture Content	<5%
Bulk Density	approx. 1.4 t/m ³
Acid Solubility	<1%
Material <75 µm	<1%
Specific Gravity	>2.5

Test Methods

AS 1289.2.1.1
AS1141.4, AWS App D
AWWA-B100 (50% HCl)
ASTM C117, AS1141.12
ASTM C128, AS 1141.5

River Sands operates and maintains a Quality Certified system in accordance with AS/NZS ISO 9001
The Quality system is third party certified by NATA. Registration # 6898
River Sands also maintains a registered NATA laboratory. Registration # 10470